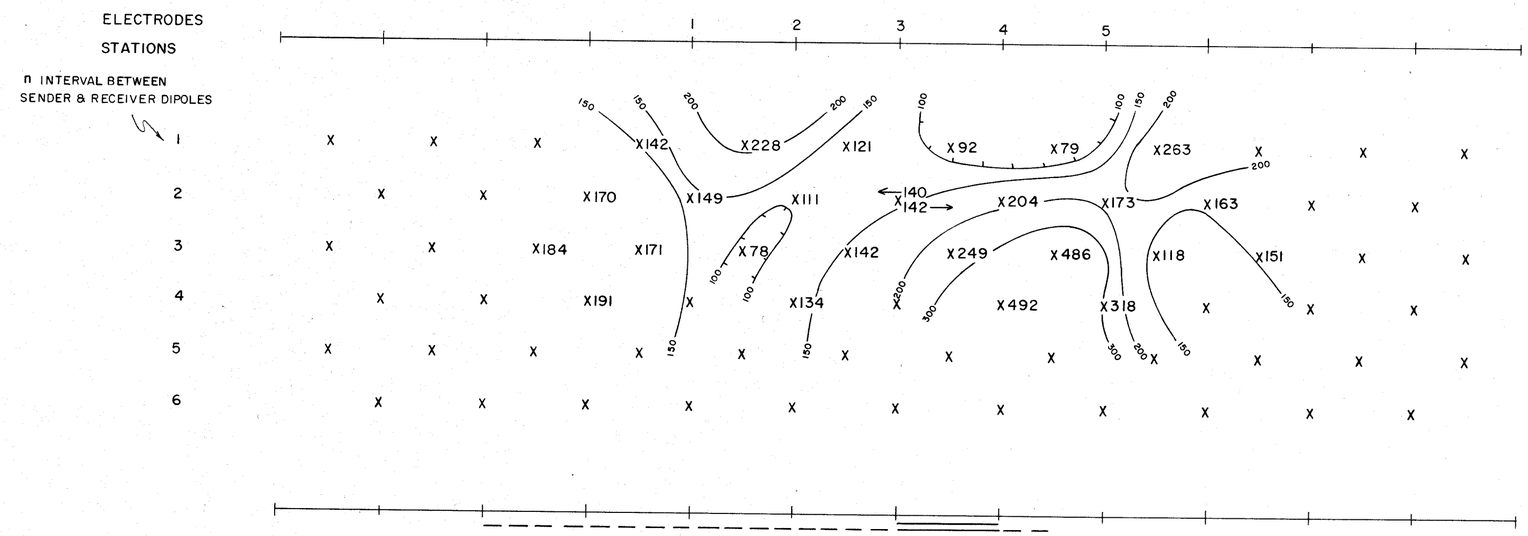

APPARENT RESISTIVITY ($\rho_{DC}/2\pi$)
IN UNITS OF OHM FEET
CONTOUR INTERVAL LOGARITHMIC
SENDER FREQUENCY 0.05 c.p.s.

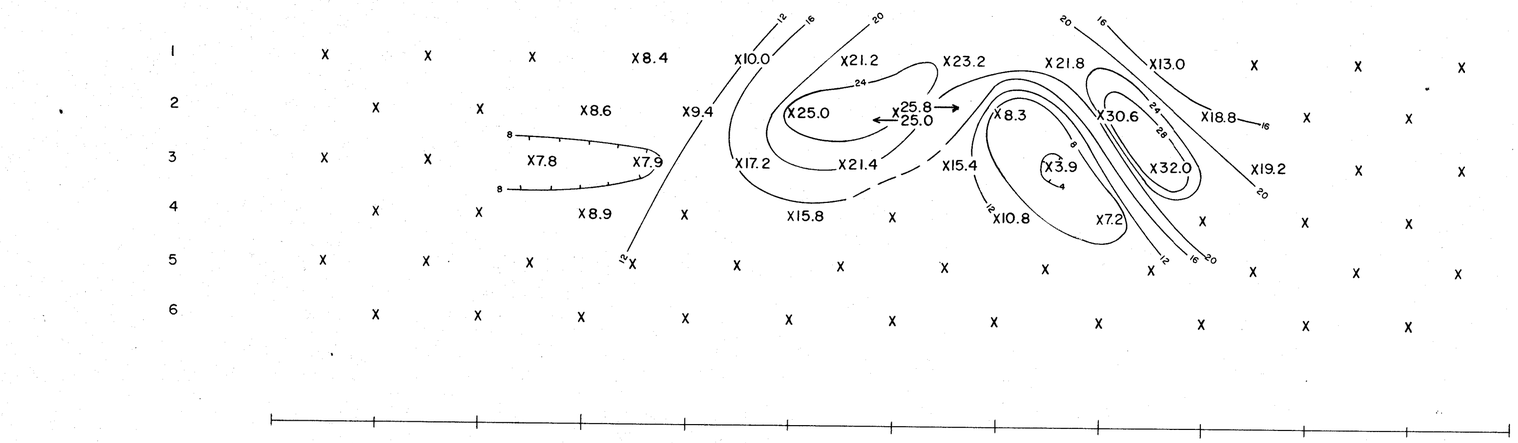

PERCENT FREQUENCY EFFECT (PFE)
CONTOUR INTERVAL CONSTANT
SENDER FREQUENCIES 0.05 & 3.0 c.p.s.

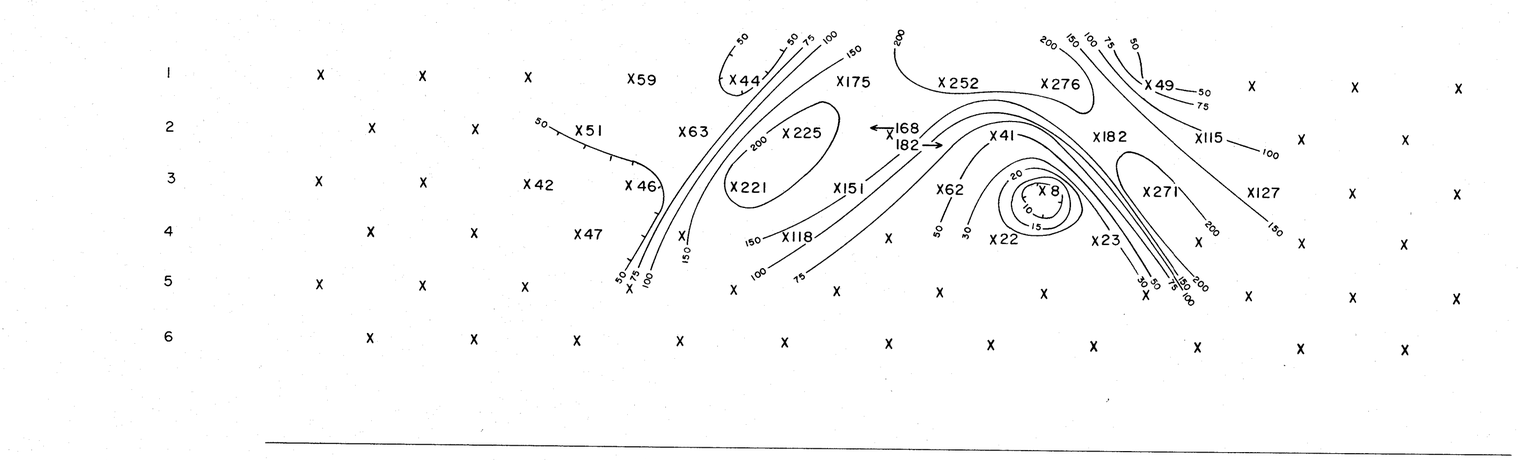

APPARENT "METALLIC CONDUCTION" FACTOR (MCF)
$\left(MCF = \frac{PFE \times 1000}{\rho_{DC}/2\pi}\right)$
CONTOUR INTERVAL LOGARITHMIC

SELF POTENTIAL

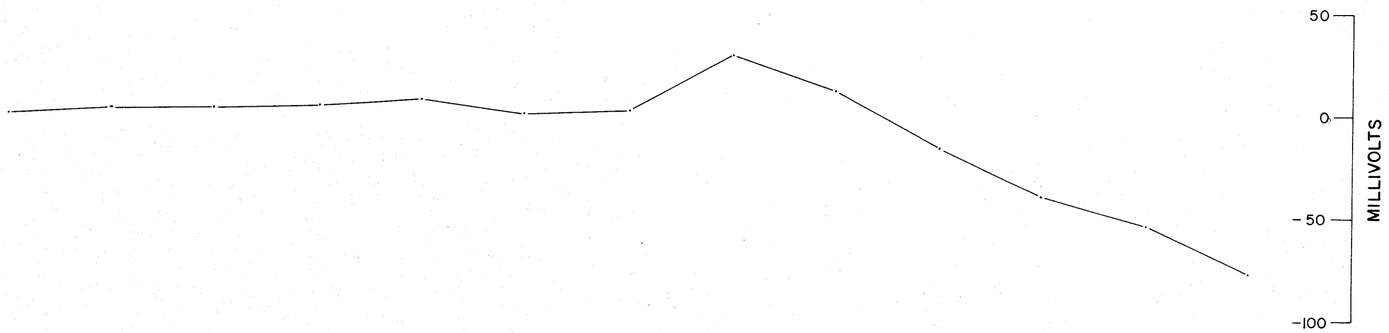

EXPLANATION

ELECTRODE ARRAY



RELATIVE ANOMALY STRENGTH



LOOKING NE

BARCELONA AREA

SECTIONAL DATA SHEET

LINE NO. 4

INDUCED POLARIZATION TRAVERSE

HEINRICHS GEOEXPLORATION COMPANY

SCALE: 1" = 500' DATE: SEPT. 1966

FOR

KERR-McGEE INDUSTRIES
TUCSON, ARIZONA

0440 0062

032-023-

213