60001261

Mining District File Summary Sheet

DISTRICT	Rosebud
DIST_NO	4010
COUNTY If different from written on document	Pershing
TITLE If not obvious	Rosebud Drill Hole File - Hole No. RE-24
AUTHOR	K. Kenner
DATE OF DOC(S)	1989
MULTI_DIST Y / (N?) Additional Dist_Nos:	
QUAD_NAME	Sulphur 7.5'
P_M_C_NAME (mine, claim & company names)	Rosebud Mine; Rosebud Project; Lac Minerals (USA) Inc Environmental West Exploration
COMMODITY If not obvious	gold silver
NOTES	Drill log; geology; assay; total depth 480' handwritten notes 15 p.

Keep docs at about 250 pages if no oversized maps attached
(for every 1 oversized page (>11x17) with text reduce
the amount of pages by ~25)

	Initials	Date
SS:	DD	5/19/08
DB:	mdh	
SCANNED:		

Revised: 1/22/08

DRILL LOGS RE-24

Rosebud

60001261 4010

6600 1261

LAC MINERALS (U.S.A.) INC.

DRILL LOG SUMMARY SHEET

PROJECT ROSEBUD

HOLE NUMBER RE-24 TOTAL DEPTH 480' LOGGED BY KLK

Date started July 17, 1989 0-245'
July 18, 1989 245-480'

Date completed

Initial bearing S~~1~~2°~~E~~W

Initial inclination -58°

Elevation 5290.5

Collar coordinates:

N 2203330

E 481281.0

Contractor: ENVIORNMENTAL WEST EXPLORATION

Drill Type: Reverse Circulation

Hole Size: Hammer 5½" 0-480'

Drilling Conditions:

Footage: Wet / Dry DRY: 0'-245'
WET: 245' → 480'

Comments: hit H2O @ 243'
went to H2O @ 245-250'
315-320 hit FAULT zone w/ ↑ H2O

DOWN HOLE SURVEY INFORMATION

FROM	TO	SURVEY POINT	INCLI-NATION	BEARING	X (Northing)	Y (Easting)	Z (Elevation)
0	50		-58	S02W			
50	150		-60	"			
150	250		-62	"			
250	350		-64	"			
350	450		-66	"			
450	480		-66.5	"			

C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 1 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ARGILLIC W M S	SILICIFICATION W M S	PROPYLLITIC W M S	COLOR FINES	LIMONITE W M S	HEMATITE W M S	JAROSITE W M S	% SULFIDES	OTHER COMMENTS	Au	Au V	Ag	As	Hg	Sb	Se
0-	POOR	Bud Breccia - clasts are white clay altered w/ lt sage green matrix + argillic clay alt, weak calcedony veining, local bands of, wh. mod pervasive silicification, weak limonitic clay + druzy qtz vns, + hairline + bedwork qtz						lt cream yellow				tr limon replac py		.001		<.10				
5-	POOR	Same						"				"		.001		<.10				
10-	MODERATE	same w/ wk ↑ pervasive SiO_2 ↓ argillic clay alt						"				"		.003		<.10				
15-	"	same w/ wk ↑ pervasive SiO_2						"				"		.006		<.10				
20-	GOOD	same w/ wk ↑ propyllitic green alt, wk ↑ perv. SiO_2, wk ↑ limonite						"				"		.002		<.10				
25-	"	same w/ ↑ druzy vuggy qtz vns ↑ perv. SiO_2 ↑ bleaching ↓ propyllitic green alt ↑ stkwk qtz						"				"		.003		<.10				
30-	"	same w/ ↑ hemitite ↑ propyllitic green alt ↑ perv. limon						"				"		.002		<.10				
35-	"	same ↓ green wk ↑ druzy limonite qtz vns						"				"		.024		<.10				
40-	"	same wk ↑ limonitic druzy qtz vns						"				"		.001		<.10				
45-	"	same w/ kaolyt clay zones						"				"		.002		<.10				
50-																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 2 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ARGILLIC W M S	SILICIFICATION W M S	PROPYLLITIC W M S	COLOR FINES	LIMONITE W M S	HEMATITE W M S	JAROSITE W M S	% SULFIDES	OTHER COMMENTS	Au	Au ✓	Ag	As	Hg	Sb	Se
50-	GOOD	Bud Breccia - fragmental, weak pervasive bleaching, wk perv. prop/illitic green alt clasts clay (white ± FeOx) alt weak calcedonic qtz VNS w/ clayallic clay alt local seams perv. silicif. to hairline stockwk qtz w/ drusy qtz + limon VNS						creamy yellow				te limon replacing py		.001		<.10				
55-	"	same w/ ↑ druzy + calcedonic qtz VNS ± limonite w/ limonitic clay, te white clay						"				"		.003		.10				
60-	"	same w/ bleached tuffaceous component ↑↑ stockwork qtz VNS + druzy VNS ↑ perv. FeOx micro Δia VNS wk ↑ perv. SiO2						orangish yellow				"		.003		<.10				
65-	"	same @ 60-65 w/ ↑↑ tuffaceous component ↑↑ pervasive limonite						FAULT Golden Yellow				"		.001		<.10				
70-	"	same @ 60-65 w/ str tuffaceous component ↑ perv. hem + limon						GOLDEN ORANGE				"		.001		<.10				
75-	"	same @ 60-65 w/ str tuff component ↑ perv. hem + limon						"				"		.003		<.10				
80-	"	same @ 60-65 - tuff w/ ↑ bleaching mod well silicified w/ local bright CORAL COLORATION						orange yellow				"		.001		<.10				
85-	"	same @ 60-65 - bleached tuff w/out propy alt, wkly flecked w/ brown mineral						"				"		.002		<.10				
90-	"	same @ 60-65 → primarily bleached tuff flecked w/ brown mineral						"				"		.001		<.10				
95-	"	same @ 60-65 - bleached tuff flecked w/ brown mineral						"				"		.002		<.10				
100-																				

60-65 lith change ↓ into tuff

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 3 OF 10

Depth	Recovery	Lithologic Description	Graphic Log	Graphic Alteration	Alteration: Argillic W M S	Alteration: Silicification W M S	Alteration: Propyllitic W M S	Color Fines	Mineralization: Limonite W M S	Mineralization: Hematite W M S	Mineralization: Jarosite W M S	% Sulfides	Other Comments	Analyses: Au	Au ✓	Ag	As	Hg	Sb	Se
100–105	GOOD	Buff fine grained tuff, weakly perv. silicified perv. bleached wk drusy qtz + limonite, vns, fine hairline stockwork flecked w/ red brown mineral wk perv. argillic alt 102-109 FAULT ZONE		XX Xk HM				CREAM orange yellow				wk limon replac PY		.002		<.10				
105–110	"	same w/ local flecks - specular hematite		XX Xk HM				"				"		.001		<.10				
110–115	SPARSE	same w/ ↑ perv. argillic clay alt ↓ perv. SiO2 ↓ limon		X Xk HM				"				"		.033		<.10				
115–120	"	same w/ ↑ perv. argillic alt ↓ perv. SiO2 + limon		X Xk HM				"				"		.001		<.10				
120–125	GOOD	same w/ gray white hue wk perv. SiO2 only wk drusy + stockwk qtz		X Xk HM				cream ± org				"		.001		<.10				
125–130	"	same w/ ↑ hematite		X Xk HM				creamy Red Org				"		.003		<.10				
130–135	"	same		X Xk HM				RED orange BUFF				"	wk diss black mineral	.001		<.10				
135–140	"	same w/ ↑ perv. argillic clay alt		Xk HM				"				"	"	.001		<.10				
140–145	"	same tuff w/ mixed green bud breccia w/ mod lt white green to gray clay weak red orange clay fragmental is mod argillically alt	LAVA	Xk HM P				"				~1% diss ± vn py	"	.001		<.10				
145–150	"	bud breccia - chloritic, mod str limonite argillic, w/ gray clay wk quartz ± stockw + FeOx + goethite local brecciation	LAVA	Xk HM P				GOLDEN yellow				" @ <1%	"	.002		<.10				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 4 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ALTERATION: ARGILLIC (W M S)	ALTERATION: SILICIFICATION (W M S)	ALTERATION: PROPYLLITIC (W M S)	COLOR FINES	MINERALIZATION: LIMONITE (W M S)	MINERALIZATION: HEMATITE (W M S)	MINERALIZATION: JAROSITE (W M S)	% SULFIDES	OTHER COMMENTS	ANALYSES: Au	Au ✓	Ag	As	Hg	Sb	Se
150	GOOD	white to wkly locally gray clay w/ drusy qtz + stkwork qtz vns w/in Bud Breccia	CLAY	Xc Xk p				WHITE				1-2% vn + diss py		.002		<.10				
155	"	Bleached & silicified lim fragmental w/h white to locally gray clay drusy + stockwork qtz vns. GOOD tuffaceous component w/ kaolin frags		X Xk p				GOLDEN orange				"		.002		<.10				
160	"	same w/ ↑ pervasive limonite local wk tuffaceous component ↑ perv. argillic alt local purple hue to blue green mineral		X Xk p				Red org				"		.004		.28				
165	"	Blue green Bud breccia w/ wk local light colored matrix w/h white waxy clay w/h drusy ± stockwork qtz vns, pervasive argillic alt		Xk p				very lt gray green				2-3% diss + vn py		.003		<.10				
170	"	same w/ tr limonitic drusy vns ↑ perv. bleaching ↑ stkwk + drusy vns w/ gray white chlor		Xk p				"				" @ ~3-4%	poss w/ marcasite	.003		.18				
175	"	same @ 165-170 w/ ↑ stockwork + drusy + bleached epiclastic ~ 65%		Xk p				gray				" @ ~4%	"	.004		.48				
180	"	Bleached Volcaniclastic w/ perv. strong argillic alt good stockwork + drusy + sulfide qtz vns w/ local silicification tuff beds, w/h white clay		X Xk				"				" @ 4%+	"	.003		.23				
185	"	same @ 180-185 predom epiclastic str drusy + stkwk qtz		X Xk				"				"	"	.004		<.10				
190	"	same @ 180-185 w/ green Bud breccia		Xk X				"				" @ 3%	"	.003		<.10				
195	"	same w/ fragmental component poss wk Fe sulfate stain w/c have white waxy clay ↑ argillic alt		Xk X				MUSTARD GREEN				" @ ~1%	"	.003		<.10				
200																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 5 OF 10

	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ALTERATION: ARGILLIC W M S	ALTERATION: SILICIFICATION W M S	ALTERATION: PROPYLLITIC W M S	COLOR FINES	MINERALIZATION: LIMONITE W M S	MINERALIZATION: HEMATITE W M S	MINERALIZATION: JAROSITE W M S	% SULFIDES	OTHER COMMENTS	ANALYSES: Au	Au V	Ag	As	Hg	Sb	Se
200	GOOD	Bxd breccia wkly bleached to flesh colored clay alt clasts w/ green to blue green matrix wk to wkly mod stockwork ¿drusy qtz vns locally encapsulating sulfides		Xk p				GRAY				2-3% diss tvn py tr pos marcasite		.002		<.10				
205	"	Same w/ slight ↓ stwk + drusy vns		Xk p				"				"		<.001		<.10				
210	"	Same w/ poss tuffaceous to epiclastic component		Xk p				"				" @ ~2%		.001		.14				
215	"	Same locally brecciated		Xk p				"				" @ ~3%		.003		<.10				
220	"	Same locally brecciated wk ↑ flesh coloration		Xk p				"				"		.002		<.10				
225	"	Same more flesh to gray buff in coloration w/ ↓ pers. propyllitic alt wk calcedonic qtz local wk silicification		X Xk p				"				" @ 3%+		.002		<.10				
230	"	Same w/ pervasive flesh to gray buff coloration wk white chaud waxy clay		X Xk p				"				" @ 2-3%		.001		<.10				
235	"	Same w/ weak pervasive silicification only tr stwk to drusy qtz vns		X Xk p				"				"		.003		<.10				
240	"	Same w/ very strong white translucent drusy qtz vns. w/ local assoc sulfide & clay wk ↑ pers SiO_2 hit little H_2O @ 243'		Xk p				"				"		.002		.28				
245	"	Same gray white ¿green moderately argillically alt ↑ drusy qtz vns		Xk p				C"				" @ 2-3%		.001		.14				
250																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 6 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ALTERATION: ARGILLIC W M S	ALTERATION: SILICIFICATION W M S	ALTERATION: PROPYLLITIC W M S	COLOR FINES	MINERALIZATION: LIMONITE W M S	MINERALIZATION: HEMATITE W M S	MINERALIZATION: JAROSITE W M S	% SULFIDES	OTHER COMMENTS	ANALYSES: Au	Au ✓	Ag	As	Hg	Sb	Se
250	MODERATE	Bleached gray white + green fragmental-Bud Breccia ↑ pervasive argillic clay alt bleach grade locally w/ ↑ perv. silicification wh hard waxy white clay, coarse drusy qtz + hairline stockwork qtz VNS w/assoc sulfides		x Xk ++++ p				GRAY				2-3% fine diss + VN pyrite assoc VNs	+ silver mineral float / cassite	.001		.19				
255	"	same w/ ↑ pervasive bleaching w/ ↓ perv propylitic grn alt w/c calcite VNs w/c ↑ drusy qtz VNS + sulfide assoc		x Xk ++++ cap				"				" @ ~3%	"	.007		.38				
260	"	same w/ ↑ perv. bleaching ↓ perv. propylitic alt local coarse calcite phenos. ↑ druzy qtz marcasite + py ± playvoitite VNS 263'- fracturing		Xk ++++ cap				"				" @ 3-4%	"	.001		.27				
265	"	same w/ wk ↑ bleaching w/ ↓ propylitic alt		Xk ++++ cap				"				"	"	.002		.21				
270	"	same wk ↑ bleaching ↓ propylitic alt		Xk ++++ cap				"				" @ ~3%	"	.002		.12				
275	"	same w/ ↑ bleaching ↓ propylitic alt wk ↓ argillic clay alt ↓ druzy qtz sulfide VNS v. wk perv. silicification		x Xk ++++ cap				"				" @ 2-3%	"	.002		<.10				
280	"	same w/ ↑ argillic clay alt w/ local seams of silicification w/ mod str black sulfide float ↳ saved in sampling to be assayed		x Xk ++++ cap				"				" @ ~3%	"	.002		<.10				
285	"	same w/ mod str perv. argillic alt w/ more siliceous inner seams w/ local lt grn clay VNs		x Xk ++++ cap				"				" @ 3-4%	"	.003		<.10				
290	"	same w/ mod str lt grn clay perv. well bleached wh hard white clay		Xk ++++ cap				"				" @ ~3%	"	.002		<.10				
295	"	same mod str perv. argillic clay alt ↑ bleaching		Xk ++++ p				"				" @ ~3%	"	.003		.16				
300																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 7 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ALTERATION: ARGILLIC W M S	ALTERATION: SILICIFICATION W M S	ALTERATION: PROPYLLITIC W M S	COLOR FINES	MINERALIZATION: LIMONITE W M S	MINERALIZATION: HEMATITE W M S	MINERALIZATION: JAROSITE W M S	% SULFIDES	OTHER COMMENTS	ANALYSES: Au	Au V	Ag	As	Hg	Sb	Se
300	MOD. GOOD	Fluor colored Red Breccia strongly clay alt bleached + white-red white to gray clay gouge, drusy + hairline stockwork qtz & local sulfide encapsulation v. wk propy grnalt pod w/ contamination local						gray				3% fine diss + vn py + marcasite		.003		<.10				
305	"	hydrothermal brecciation + silicification some w/ wk white clay gouge w/ whity red contamination ↓ propy alt						"				" @ 3-4%		.003		.19				
310	"	same - wk white clay gouge wk contamination wk ↓ propyllitic alt						"				"		.003		<.10				
315	GOOD	same - brecciated local wk silicificat w/ poss tuff component wk ↓ spru argillic alt FAULT ZONE w/ contamination						gray white to flesh buff				"		.004		<.10				
320	"	w/ tuffaceous component - prominent w/in fault zone w/ local zones silicification ↓ propyllitic grn alt wk soft bright white clay ↑ drusy qtz + sulfide vns						"				"		.004		<.10				
325	"	same clasts - white clay altered - fragmental w/ poss tuffaceous component - texture difficult to distinguish wk contamination						"				"		.003		<.10				
330	"	same @ 325-330 w/ wk contamination						"				"		.003		<.10				
335	"	same @ 325-330 w/ ↑ qtz stockworking						"				" @ ~4%		.005		<.10				
340	"	same grayish tuff - argillically alt w/ good stockwork + drusy qtz vns locally whity silicified						"				" @ 5-6%		.004		.12				
345	"	same grayish tuff locally altered w/ local silicified zones						"				" @ ~4%		.005		<.10				
350																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 8 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION (Dozer? into Hodgpodge)	GRAPHIC LOG	GRAPHIC ALTERATION	ARGILLIC W M S	SILICIFICATION W M S	PROPYLLITIC W M S	COLOR FINES	LIMONITE W M S	HEMATITE W M S	JAROSITE W M S	% SULFIDES	OTHER COMMENTS	Au	Au V	Ag	As	Hg	Sb	Se
350	GOOD	Flesh to gray buff tuff grainy argillic to silicified v/fine aphanitic w/ gn white clay, weak contamination throughout, good hairline stockwork + drusy qtz lightly encapsulating sulfides + clay		X XK HH				GRAY BUFF FLESH				~5% diss + strong VN pyrite + marcasite ± aus sno		.006		<.10				
355	"	Local mitrobreccia demo		X XK HH				"				" @ ±5%		.005		.13				
	"	Same																		
360	"	Same w/ ↑ milky translucent drusy qtz VNS		X XK HH				"				"		.006		<.10				
365	"	Same w/ ↑ mod hard white clay ↑ pers. silicification / argillic alt		XX XK HH				"				"	poss w/ chalco pyrite	.006		<.10				
370	"	Same w/ ↑ pers. SiO2 & argillic alt + w/ calcedony VNS w/ milky green to white translucent		XX XK HH Xc				"				"	"	.006		<.10				
375	"	Same w/ darkish tan coloration ↑ pers. SiO2 w/ fragmental component mod ice blue gray calcedony VNS translucent		XX XK Xc HH				"				" @ ~4%		.008		.23				
380	"	Fine fragmental coarse bleached to clay alt to argillized w/ predominant translucent silicamorphic w/ local grey coloration pervasively silicified w/ gray translucent calcedony VNS weak volcaniclastic component		XX XK Xc HH P				lt gray green				" @ 3-4%		.005		<.10				
385	"	white to dk drusy qtz + hairline stockwork VNS w/ contamination throughout		XX XK Xc HH P				"				"		.009		.11				
		Same w/ tuffaceous - flesh color component v. wk ↑ propyllitic green alt mod stv calcedony veining																		
390	"	Same w/ mod stv lt gray translucent calced. VNS w/ local zones strong argillic alt w/ flesh tuffaceous component		X P XK HH Xc				gray + flesh				" @ ~3%		.004		<.10				
395		Same w/ few dark gray + amber calcedony stockwk tuff + fine fragmental w/ ↑ argillic alt		XC XKP HH				"				" @ 3-4%		.013		.59				
400																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 9 OF 10

Depth	Recovery	Lithologic Description	Graphic Log	Graphic Alteration	Alteration: Argillic (W M S)	Alteration: Silicification (W M S)	Alteration: Propyllitic (W M S)	Color Fines	Mineralization: Limonite (W M S)	Mineralization: Hematite (W M S)	Mineralization: Jarosite (W M S)	% Sulfides	Other Comments	Analyses: Au	Au V	Ag	As	Hg	Sb	Se
400-	GOOD	lt/dk color flow banded tuff w/ lime fragmental tuff ↑ silicification fragmen w/ hardline alt bottom of 5' int. w/ lt green grn clay wk pyr argillic alt gray/white translucent calcedony lns, wk drusy + stockwork qtz	CLAY	X XC XK +++ P				gray flesh				3%+ fine diss + VN py + max casite		.055		.96				
405-	MODERATE	wk contamination through grout + lt green clay only wh lt/dk tuff @ above w/ strongly argilic + drusy alt fragmental w/ very strong calcite veining	CALCITE	XC X XK +++ CA P				WHITE + green				" @ 2-3%		.034		.25				
410-	"	almost pure calcite w/ few frag @ above	CALCITE	XC +++ XK P CA				WHITE				" @ ~2%		.007		<.10				
415-	"	almost pure calcite w/ few frag @ above	CALCITE	XC +++ XK P CA				"				" @ ~2%		.008		<.10				
420-	GOOD	same @ above w/ ~50%-60% lt sage green grainy tuff - poss wkly silicified v. weak bleach siliceous tuff, wk gray + green bright green - v. weak fragmental, mod clay	CA	X XC +++ P CA				lt white green				"		.009		.28				
425-	"	lt sage green silicified fragmental, wh calcite veining, wh drusy + stockwork qtz w/ local sulfide encapsulation wh pervasive bleaching ± wh clay alt + wk contamination	CA	X XK +++ P CA				lt sage green				"		.007		<.10				
430-	"	same w/ local ↑ bleaching w/ wk lt green tuff component fairly hard	CA	X XK +++ CA P				"				"		.006		<.10				
435-	"	lt sage green tuff - fairly hard ± silicification wh pervasive bleaching tr white clay wh fine hairline stockwork qtz vns wh calcite weak contamination - flesh frag	CA	X XK CA				"				1-2% fine diss py		.013		.11				
440-	"	same @ 435-440 w/ minor silic Alia frag w/ wk drusy qtz vns	CA	X XK +++ CA P				"				" @ ~2%		.011		.12				
445-	"	same w/ few silic Alia frag - locally gray	CA	X XKP +++ CA				"				"		.014		.12				
450-																				

.C MINERALS U.S.A. INC.

LAC

PROJECT ROSEBUD LOGGED BY KLK HOLE NO. RE-24 PAGE 10 OF 10

Depth	RECOVERY	LITHOLOGIC DESCRIPTION	GRAPHIC LOG	GRAPHIC ALTERATION	ALTERATION: ARGILLIC (W M S)	ALTERATION: SILICIFICATION (W M S)	ALTERATION: PROPYLLITIC (W M S)	COLOR FINES	MINERALIZATION: LIMONITE (W M S)	MINERALIZATION: HEMATITE (W M S)	MINERALIZATION: JAROSITE (W M S)	% SULFIDES	OTHER COMMENTS	ANALYSES: Au	Au V	Ag	As	Hg	Sb	Se
450	Good	Lt sacgrn tuff, fine grained to grainy weak pervasive bleaching, rarely silicified to zones or argillic, clay alt wh to whitish, mod calcite veining, ∥ weak barren stockwork qtz + local sulfides		X XK ++ Ca P				Lt sagu green				2% fine diss + VN Py		.008		.29				
455	"	wh drusy qtz vns to white clay local bleaching to white v. wk contaminat.		X XK ++ Ca P				"				"		.004		<.10				
460		same w/ flecking of chl? contaminated																		
465	"	same " " "		X XK ++ Ca P				"				"		.003		<.10				
470	"	same " "		X XK ++ Ca P				"				" @ 1-2%		.030		.37				
475	"	same " "		X XK ++ Ca P				"				"		.025		.24				
480	"	same " "		X XK ++ Ca P				"				"		.024		.37				
485		T.D.																		
490																				
495																				
500																				

N 2,203,30
E 481,281

5290

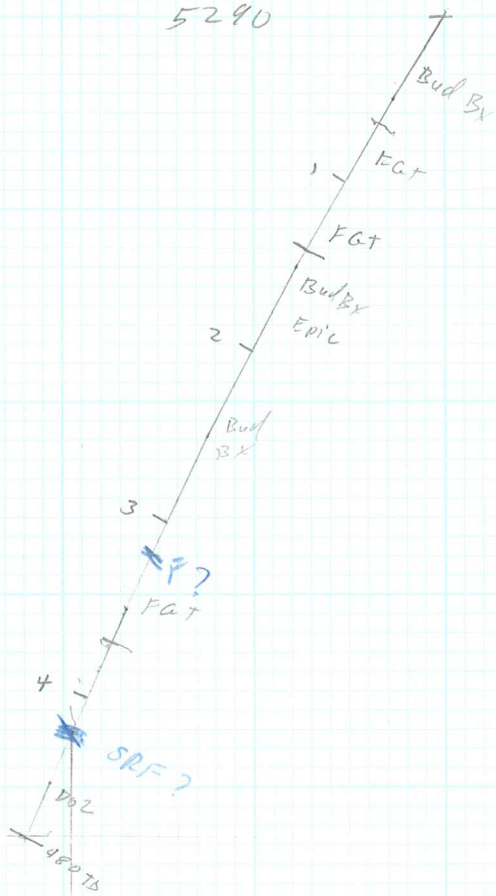

CANT PICK SRF OFF
THIS LOG
should Relog

ROSE BUD
RL-24
In plane of sec
1" = 100'

August 9, 1989
GSI - 915411

4929

	Sample I.D.			Au o/t	Ag o/t
31	RE-23	490	495	0.009	<.10
32	RE-23	495	500	0.009	<.10
33	RE-23	500	505	0.007	<.10
34	RE-23	505	510	0.002	<.10
35	RE-23	510	515	0.007	0.17
36	RE-23	515	520	0.007	<.10
37	RE-23	520	525	0.007	<.10
38	RE-23	525	530	0.010	0.10
39	RE-23	530	535	0.048	0.16
40	RE-23	535	540	0.006	<.10
41	RE-23	540	545	0.003	0.16
42	RE-23	545	550	0.002	<.10
43	RE-23	550	555	0.008	<.10
44	RE-23	555	560	0.014	0.50
45	RE-23	560	565	0.009	0.18
46	RE-23	565	570	0.003	<.10
47	RE-23	570	575	0.004	<.10
48	RE-23	575	580	0.003	<.10
49	RE-23	580	585	0.001	<.10
50	RE-23	585	590	0.002	<.10
51	RE-23	590	595	0.002	<.10
52	RE-23	595	600	0.001	0.56
53	RE-23	600	605	0.003	0.18
54	RE-23	605	610	0.007	<.10
55	RE-23	610	615	0.001	<.10
56	RE-23	615	620	<.001	0.20
57	RE-23	620	625	0.001	<.10
58	RE-23	625	630	<.001	<.10
59	RE-23	630	635	0.003	3.86
60	RE-23	635	640	<.001	<.10
61	RE-23	640	645	0.001	<.10
62	RE-23	645	650	0.002	<.10
63	RE-23	650	655	0.001	<.10
64	RE-23	655	660	0.002	<.10
65	RE-24	0	5	0.001	<.10
66	RE-24	5	10	0.001	<.10
67	RE-24	10	15	0.003	<.10
68	RE-24	15	20	0.006	<.10
69	RE-24	20	25	0.002	<.10
70	RE-24	25	30	0.003	<.10
71	RE-24	30	35	0.002	<.10
72	RE-24	35	40	0.024	<.10
73	RE-24	40	45	0.001	<.10
74	RE-24	45	50	0.002	<.10
75	RE-24	50	55	0.001	<.10
76	RE-24	55	60	0.003	0.10

24

Sample I.D.				Au o/t	Ag o/t
77	RE-24	60	65	0.003	<.10
78	RE-24	65	70	0.001	<.10
79	RE-24	70	75	0.001	<.10
80	RE-24	75	80	0.003	<.10
81	RE-24	80	85	0.001	<.10
82	RE-24	85	90	0.002	<.10
83	RE-24	90	95	0.001	<.10
84	RE-24	95	100	0.002	<.10
85	RE-24	100	105	0.002	<.10
86	RE-24	105	110	0.001	<.10
87	RE-24	110	115	0.033	<.10
88	RE-24	115	120	0.001	<.10
89	RE-24	120	125	0.001	<.10
90	RE-24	125	130	0.003	<.10
91	RE-24	130	135	0.001	<.10
92	RE-24	135	140	0.001	<.10
93	RE-24	140	145	0.001	<.10
94	RE-24	145	150	0.002	<.10
95	RE-24	150	155	0.002	<.10
96	RE-24	155	160	0.002	<.10
97	RE-24	160	165	0.004	0.28
98	RE-24	165	170	0.003	<.10
99	RE-24	170	175	0.003	0.18
100	RE-24	175	180	0.004	0.48
101	RE-24	180	185	0.003	0.23
102	RE-24	185	190	0.004	<.10
103	RE-24	190	195	0.003	<.10
104	RE-24	195	200	0.003	<.10
105	RE-24	200	205	0.002	<.10
106	RE-24	205	210	<.001	<.10
107	RE-24	210	215	0.001	0.14
108	RE-24	215	220	0.003	<.10
109	RE-24	220	225	0.002	<.10
110	RE-24	225	230	0.002	<.10
111	RE-24	230	235	0.001	<.10
112	RE-24	235	240	0.003	<.10
113	RE-24	240	245	0.002	0.28
114	RE-24	245	250	0.001	0.14
115	RE-24	250	255	0.001	0.19
116	RE-24	255	260	0.007	0.38
117	RE-24	260	265	0.001	0.27
118	RE-24	265	270	0.002	0.21
119	RE-24	270	275	0.002	0.12
120	RE-24	275	280	0.002	<.10
121	RE-24	280	285	0.002	<.10
122	RE-24	285	290	0.003	<.10

Sample I.D.				Au o/t	Ag o/t
123	RE-24	290	295	0.002	<.10
124	RE-24	295	300	0.003	0.16
125	RE-24	300	305	0.003	<.10
126	RE-24	305	310	0.003	0.19
127	RE-24	310	315	0.003	<.10
128	RE-24	315	320	0.004	<.10
129	RE-24	320	325	0.004	<.10
130	RE-24	325	330	0.003	<.10
131	RE-24	330	335	0.003	<.10
132	RE-24	335	340	0.005	<.10
133	RE-24	340	345	0.004	0.12
134	RE-24	345	350	0.005	<.10
135	RE-24	350	355	0.006	<.10
136	RE-24	355	360	0.005	0.13
137	RE-24	360	365	0.006	<.10
138	RE-24	365	370	0.006	<.10
139	RE-24	370	375	0.006	<.10
140	RE-24	375	380	0.008	0.23
141	RE-24	380	385	0.005	<.10
142	RE-24	385	390	0.009	0.11
143	RE-24	390	395	0.004	<.10
144	RE-24	395	400	0.013	0.59
145	RE-24	400	405	0.055	0.96
146	RE-24	405	410	0.034	0.25
147	RE-24	410	415	0.007	<.10
148	RE-24	415	420	0.008	<.10
149	RE-24	420	425	0.009	0.28
150	RE-24	425	430	0.007	<.10
151	RE-24	430	435	0.006	<.10
152	RE-24	435	440	0.013	0.11
153	RE-24	440	445	0.011	0.12
154	RE-24	445	450	0.014	0.12
155	RE-24	450	455	0.008	0.29
156	RE-24	455	460	0.004	<.10
157	RE-24	460	465	0.003	<.10
158	RE-24	465	470	0.030	0.37
159	RE-24	470	475	0.025	0.24
160	RE-24	475	480	0.024	0.37
161	RE-25	0	5	0.030	0.44
162	RE-25	5	10	0.004	<.10
163	RE-25	10	15	0.002	<.10
164	RE-25	15	20	0.001	0.27
165	RE-25	20	25	0.001	<.10
166	RE-25	25	30	0.001	<.10
167	RE-25	30	35	0.001	<.10
168	RE-25	35	40	<.001	<.10