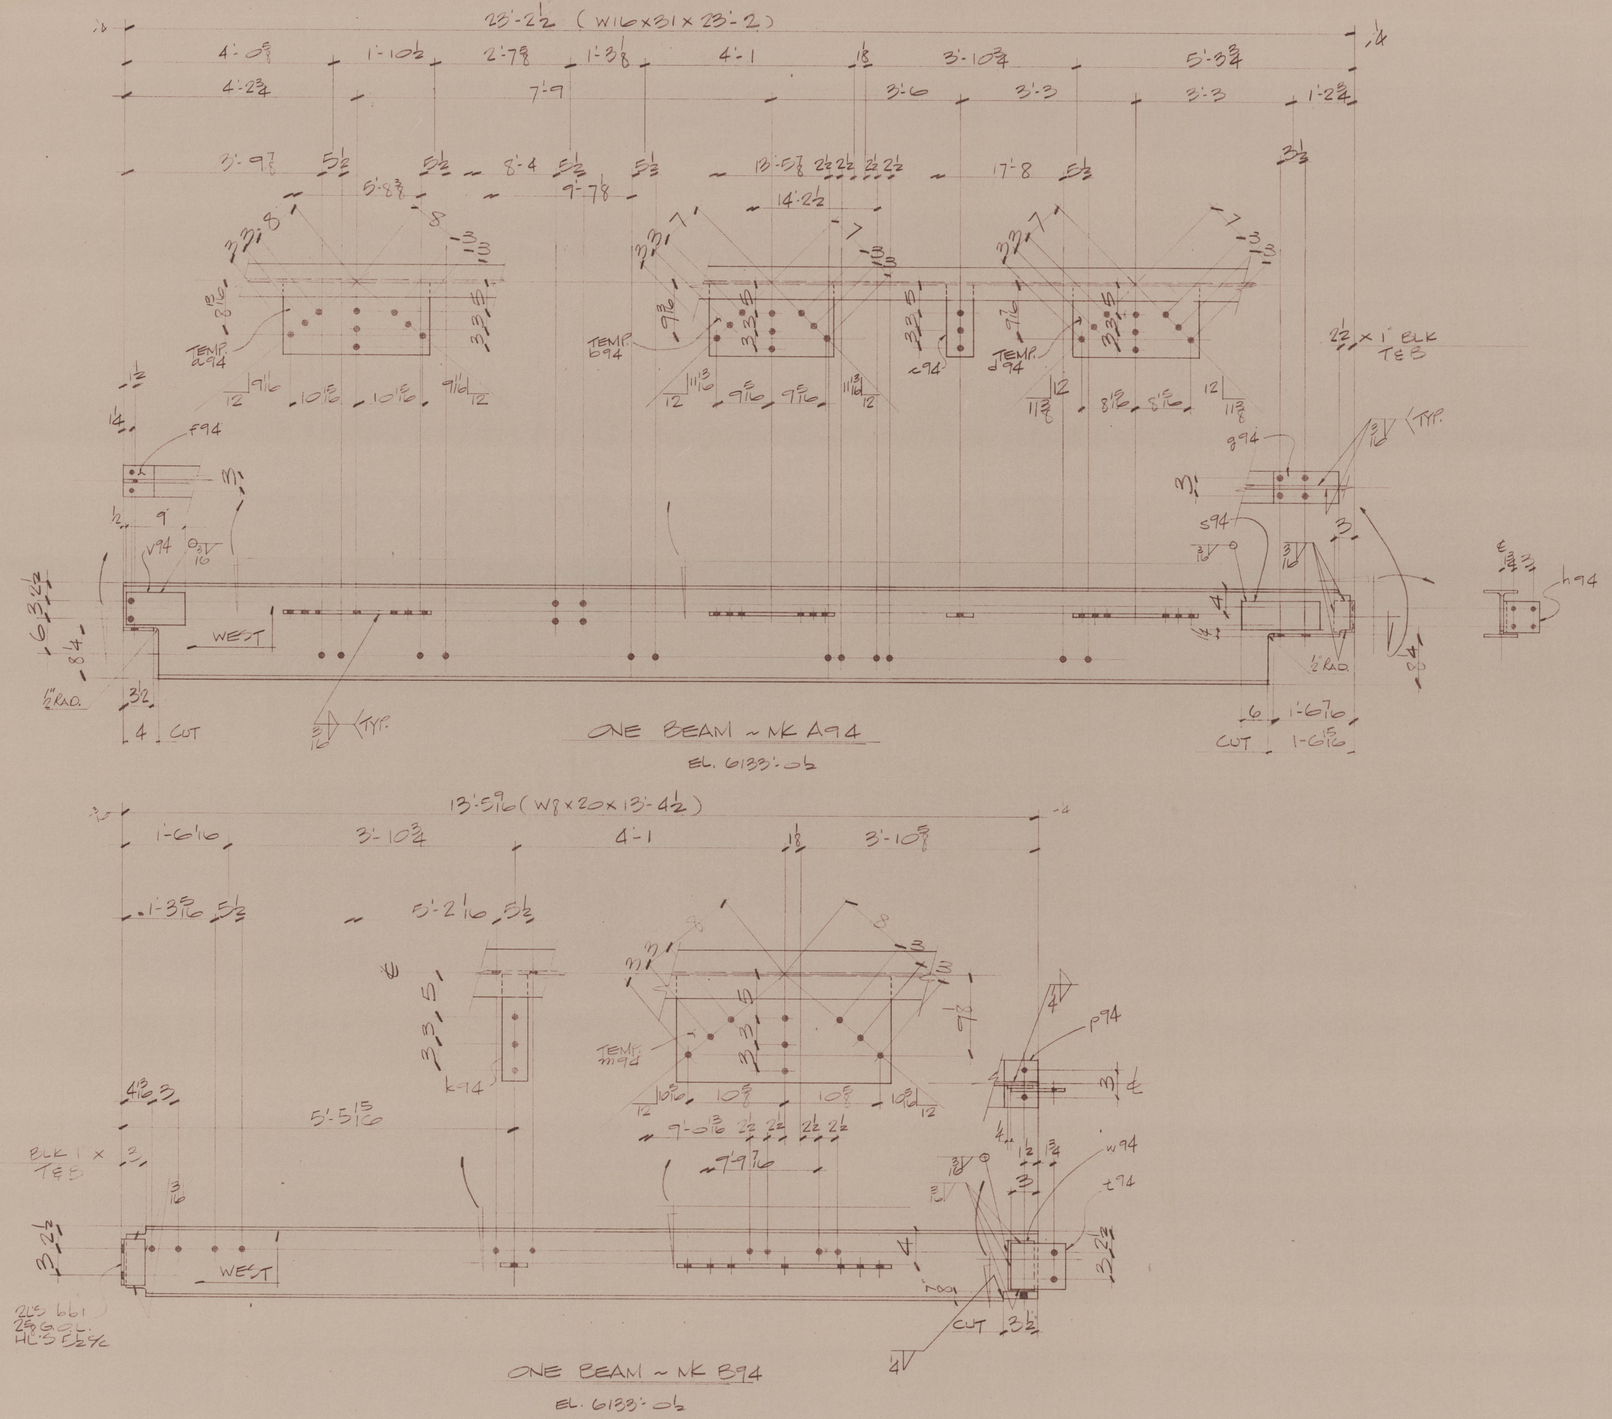

SHOP BILL OF MATERIAL									
NO. PIECES	SECTION	LENGTH FT.	LENGTH INCHES	PIECE MARKS	REMARKS	TOTAL LENGTH OR SQ. FT.	NET WEIGHT UNIT	NET WEIGHT TOTAL	NO. PCS.
1	W16x31	23	2	A94					
1	PL 3/8 x 12 1/4	2	0½	a94	TEMP.				
1	PL 3/8 x 12 1/4	1	9¼	b94	TEMP.				
1	PL 3/8 x 4	1	0¼	c94					
1	PL 3/8 x 12 1/4	1	8½	d94	TEMP.				
1	PL 3/8 x 3½	0	5½	f94					
1	PL 3/8 x 5½	1	3 15/16	g94					
1	PL 3/8 x 5½	0	8¼	h94	BNT				
2	PL 3/16 x 5	1	0	s94					
2	PL 3/16 x 5	0	9	v94					
1	W8x20	13	4½	B94					
1	PL 3/8 x 4	1	0¼	k94					
1	PL 3/8 12 1/4	1	11¾	m94	TEMP.				
1	PL 3/4 x 3½	0	5¼	p94					
1	PL 3/8 x 5½	0	6	t94					
2	L4x3x5/16	0	5½	bb1					
1	PL 3/16 x 3	0	6	w94					

NO PAINT WITHIN 5" OF ALL HOLES

DE BURR ALL HOLES

FIELD BOLTS
68 - ¾ ϕ A325 x 1¾
2 - ¾ ϕ A325 x 2¼

V-1156- 98-6

SPEC. 254-1156-121

REVISIONS					REFERENCES
NO.	DATE	MADE BY	CHK. BY	DESCRIPTION	E2

TITAN STEEL CORPORATION
205 East 21st South
Phone (801) 486-0721
P.O. Box 15425
Salt Lake City, Utah 84115

BEAM DETAILS
TUNGSTEN - CONCENTRATOR
MILL BUILDING - FLOTATION AREA

HOLES: 13/16 ϕ
PAINT: POWER TOOL CLEANING 1 S/C PRIMER (SEE SPEC'S)

ENGINEER: ACRES AMERICAN INC.
CUSTOMER: UNION CARBIDE CORP.
DR. BY: P.M.D/L.P.S
DATE:
CHK'D BY: RO
DATE: 5-26-76
P.O. TE 254-3121
JOB NO.: C5906
SHEET 94 OF

#321

4790 0827